



# LoRa® SPY Digital



Digital temperature recorder  
with a long-range LoRaWAN™ connectivity  
Simplified metrology services



Non contractual picture



## Presentation

The LoRa® SPY Digital sensor measures and records temperature with an external removable probe. Data are sent to the secure JRI secure Cloud by the LoRaWAN™ network of telecom operators members of LoRa Alliance™ or by a local network. In case of threshold excursions, real-time alerts are sent.


The LoRa® SPY Digital is designed to be used with JRI digital probes which have an internal memory to store their calibration adjustment coefficients and other metrological data. The calibration can be realized in laboratory by a simple exchange of the probe without monitoring interruption of your thermo-sensitive products.

## Technical features

Communication frequency	868 MHz	915 MHz
Interface	Status LED, sensitive button On/Off, LCD display	
Measurement	Depending on JRI digital probes	
Accuracy		
Memory	10 000 data points	
Radio range	Up to 16 km open field range	
Type of digital sensor	Temperature sensor Temperature/Humidity sensor	
Operating conditions	-30°C to +70°C	
Resolution	0.01	
Measuring interval	Adjustable from 1 mn to 5 mn	
Transmission and recording interval (internal memory)	Adjustable from 1 mn to 24 h	
Response time $\sigma_{90}$	< 5 mn (depending on used probe)	
Protection	IP40	
Case	Polycarbonate – Food contact	
Dimensions and weight	87 x 64 x 25 mm / ~ 100 g	
Power supply	Replaceable Lithium 3,6v battery	
Battery lifetime	2 to 4 years depending on use	
Fixing	Fixing eyelets and integrated magnets	
Supplied with	Blue JRI identification ring User manual on <a href="http://www.jri-corp.com">www.jri-corp.com</a>	
Compliance	CE, ROHS, FCC, EN 300 220, NF EN 12830 (when the 06556 probe is used in storage and transport applications)	
Standard calibration points	Depending on the JRI digital probe	
Part Nr	Without Battery	11809 EX
	With Battery	11809 EU

## Benefits

- **Easy-to-use**  
The recorder is ready to-use and has operating and alarm lights
- **Excellent measurement accuracy**
- **Several modes of data exploitation**

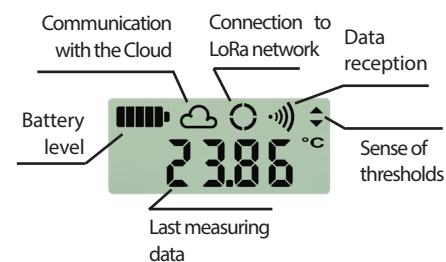

**JRI DIGITAL PROBES PART NRS**  
 12350 : Digital temperature probe, 3m flat cable (incubator version available)  
 12348 : Digital temperature probe, 40cm round cable  
 12349 : Digital temperature probe, 70 cm flat cable (incubator version available)  
 12347: Digital temperature & humidity probe -30°C to +70°C and 0-100% RH  
 12204 : Digital Low temperature probe 0°C to -200°C

17 363 EN 01 05