



LoRa® SPY T2



Temperature recorder
with a long-range LoRaWAN™ connectivity



Non contractual photo



Freezer Standard version

Presentation

The LoRa® SPYT2 measures and records temperature thanks to an external probe. Data are sent to the JRI secure Cloud by LoRaWAN™ network of the telecom operators members of the LoRa Alliance™, or by a local network. In case of threshold excursions, real-time alerts are sent.

Designed to monitor thermo-controlled chambers, the LoRa® SPY T2 can be fixed outside thanks to its magnet allowing to visualize data measurement.

Technical features


	Standard version	Incubator version
Interface	Status LED lights, On/Off touch sensitive button, LCD display	
Measurement range	-50°C to +105°C	
Accuracy	±0.3°C from -20°C to +30°C ±0.5°C out of this range	±0.2°C from +30°C to +50°C ±0.5°C out of this range
Memory	10 000 data points	
Communication frequency	868 MHz / 915 MHz	
Radio range	Up to 16 km open field range	
Sensor	External Class A PT 100 - Ø5x20mm	
Resolution	0.01	
Measuring interval	Adjustable from 1 mn to 5 mn	
Transmission & recording interval (internal memory)	Adjustable from 1 mn to 24 hrs	
Response time σ_{90}	~2 mn	
Operating conditions	-30°C to +70°C	
Protection	IP65	
Case	Polycarbonate – Food contact	
Dimensions and weight	87 x 64 x 25 mm / ~ 100 g	
Cable length	30 cm and 3 m	
Power supply	Replaceable Lithium 3,6v battery	
Battery lifetime	2 to 4 years depending on use	
Fixation	Fixing eyelets and integrated magnets	
Supplied with	Blue and green identification rings	Yellow identification ring
	User manual on www.jri-corp.com	
Compliance	CE, ROHS, FCC, EN 300-320, NF EN 12830	
Standard calibration points	-18°C / +5°C / +25°C	+36°C / +38°C / +50°C

Benefits

- **Easy-to-use**
The recorder is ready-to-use and has operating and alarm lights
- **Excellent measurement accuracy**
- **Several modes of data exploitation**



External temperature probe

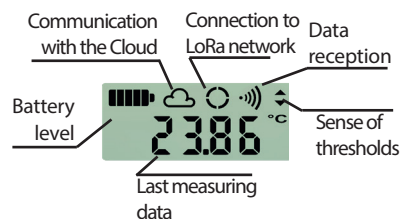

Freezer Standard version

Incubator version

17 349b EN 01 05

Part Nrs

	868 MHz		915 MHz
	With battery	Without battery	Without battery
STANDARD VERSION			
LoRa SPY T2 30cm	11804 EU	11804 EX	12269 EX
LoRa SPY T2 3m	11805 EU	11805 EX	12271 EX
INCUBATOR VERSION			
LoRa SPY T2 30cm	11804_I EU	11804_I EX	12269_I EX
LoRa SPY T2 3m	11805_I EU	11805_I EX	12271_I EX